

DCZ

Universal keyboard for managing CCTV applications from PC



Technical data

General

Backlit rubber keys

Alarm buzzer

Operating system:

- Windows® compatible
- Linux® compatible

Mechanical

Dimensions: 379×89×224mm (15×3.5×8.8in)

Unit weight: 1.4kg (3lb)

Electrical

USB powered

Consumption: 350mA max

Serial communications

USB 2.0

Dedicated Virtual Com Port protocol

Joystick HID 4-axis 40 keys emulation

Indoor installation

Operating temperature: from 0°C (32°F) up to +45°C (+113°F)

Electrical safety (CE): EN60950-1, EN62368-1

Electromagnetic compatibility (CE): EN50130-4, EN55032 (Class B), EN61000-6-3, FCC Part 15 (Class B)

UL certification: cULus Listed

EAC certification	
-------------------	--

Category	Value
KC certification	100%

ODCZKIT38	Pre-cut sheets for printing customized masks and protective transparent plastic layer
-----------	---

Model Number	Weight	Dimensions (WxHxL)
--------------	--------	--------------------

DCZ	1.9kg (4.2lb)	42.5×27×17.5cm (16.7×10.6×7in)	4
-----	---------------	--------------------------------	---



42.5×27×17.5cm (16.7×10.6×7in) 4



The keyboard can be turned round so that both right- and left-handed users can use all the functions with ease.

Technical drawings

The indicated measurements are expressed in millimetres.

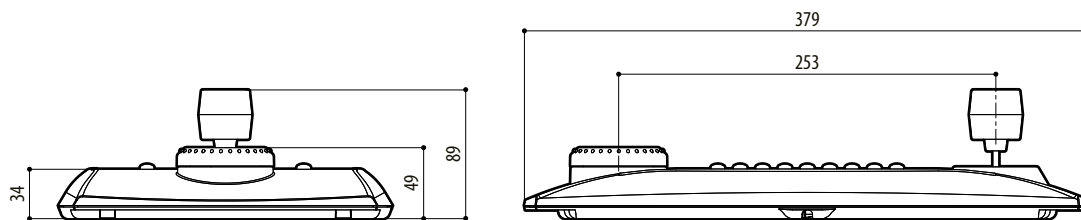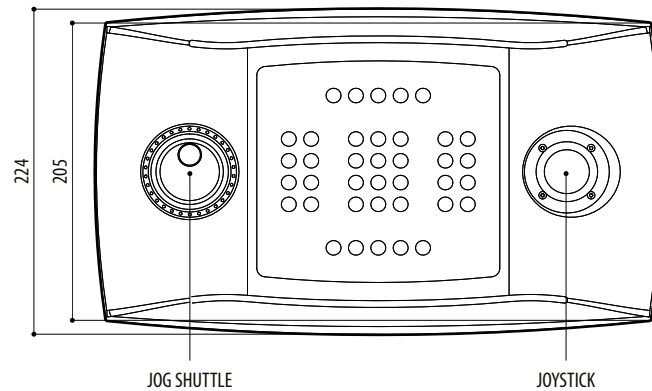

DCZ

Support

Learn more and find additional documentation at pelco.com or email support@pelco.com for specific product support.

© 2025, Pelco Inc. All rights reserved. MOTOROLA, MOTO, MOTOROLA SOLUTIONS, and the Stylized M Logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. Pelco, the Pelco logo, and other trademarks associated with Pelco products referred to in this publication are trademarks of Pelco, Inc. or its affiliates. All other product names and services are the property of their respective companies. Product specifications and availability are subject to change without notice.

FEB 2026 | | REV 1

PELCO®